HIGH-BRIGHTNESS SLIM WINDOW DISPLAY

43/49/55/65 inch

BV-WD43H/49H/55H/65H

www.betvis.com

Product Details

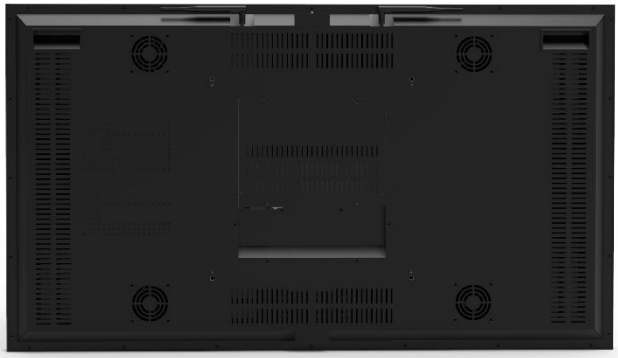

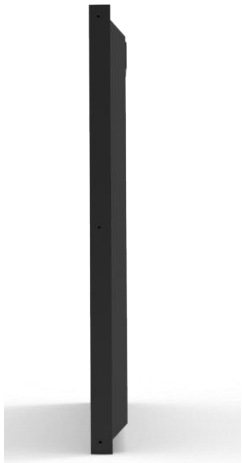

Features

High-brightness LCD Panel

Backlight brightness reaches 2,500 nits.
To achieve the best visual effect under direct sunlight.

Low Noise Design

≤ 25dB, as quiet as in the recording studio.

HD series (≤25dB) | Conversation (50dB) | Typing (75dB)

Intelligent Brightness Control

Auto adjust the screen brightness by ambient light.
To optimally save energy and keep the best visual comfort.

Industrial Ultra-thin Body

Super slim bezel for multi-screen stitching effect.
Ultra thin body for eye-catching in the public.

Display Solution

① CMS Android Solution

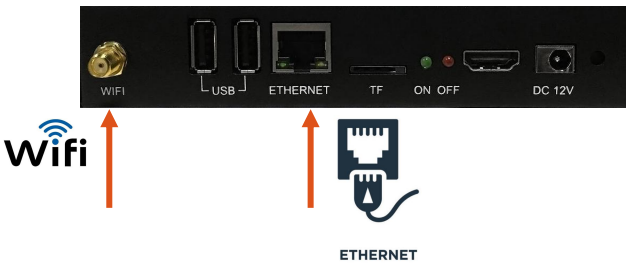

② USB Plug Update Solution

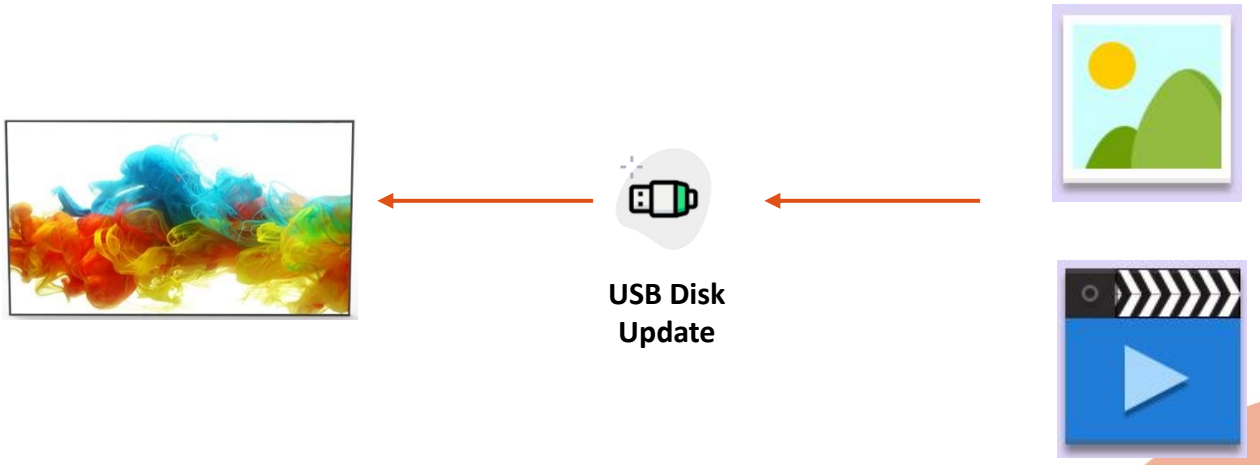

DSM80 Cloud Management Software

DSM8 APP
With free CMS software DSM80

B/S structure
Enter from browser and control from anywhere

Network Options
Support Ethernet & Wi-Fi, 3G/4G optional

Self-designed layout
Full or split screen display with picture, Image, audio, web, RSS, streaming video

Smart Download
Download content at preset time and download continuously from breakpoint

Password Protection
Set password for player to ensure the security of content and settings

Log Report
Statistics of playlist playback times, files and duration

Remote Control
Set player network, password, volume, brightness, on/off time, download time

Multi-level Management
different authority for different account

Streaming Media
Play IP streaming video in HTTP or RTSP protocol.

Live TV
Play Live TV / Video through HDMI in or AV Input

RSS Feeds
Update content like text, image and video from live feeds or third-party databases

Startup Screen
Make your logo image or a video clip as the player's startup screen

Schedule Function
schedule playlists by time, date and week, with loop, interval and insert

Offline Update
Offline update via USB / SD card

Data Sheet

MODEL		BV-WD43H	BV-WD49H
Display	Diagonal Length	43 inch	49 inch
	Resolution	1920x1080	
	Display Area	945.8 x 533.8mm	1078.8 x 608.8mm
	Brightness	2500cd/㎡	
	Viewing Angle	89°/89°/89°/89°(L/R/U/D)	
	Aspect Ratio	16:9	
	Contrast Ratio	1200:1	
	Color	16.7M/8Bit	
	Backlight Lifespan	50,000hrs	
Android Solution	CPU	Coretex-A17 RK3288,Quad Core,1.8GHz	
	Memory	DDR-3, 2GB	
	Storage	16G EMMC NAND	
	O/S	Default Android7.1(11 optional)	
	Network	Ethernet (10/100M), Wi-Fi (802.11 b/g/n) (3G/4G Mobile network optional)	
	I/O	HDMI-out*1, USB*2, DC input*1, TF card slot*1	
Monitor Solution	I/O	HDMI-in*1, USB*1, SD card slot*1	
	Play Mode	Loop display of video / image/ image + audio	
	Support Media	Video, Image, Audio	
Dimension	Appearance	Black metal shell	
	Bezel	8.5mm	
	Net Weight	14.3 KGS	17.6 KGS
	Net Size	962.8 x 550.8 x 33.5mm (with electronics back 57.2mm)	1095.8 x 625.8 x 33.5mm (with electronics back 57.2mm)
	Intallation	VESA 400*400. Wall Mounting / Ceiling / Floor Standing.	
Power	Power Input	AC 180-240V, 50/60Hz.	
	Consumption	150W	165W
Others	Speaker	2*5W	
	Working Environment	-10℃~50℃, 10%~90%	
	Storage Environment	-20℃~50℃, 5%~90%	
	Accesories	User Guide, Antenna, Power Cord	

Data Sheet

MODEL		BV-WD55H	BV-WD65H
Display	Diagonal Length	55 inch	65 inch
	Resolution	3840x2160	
	Display Area	1213.8 x 684.8mm	1432.8 x 807.8mm
	Brightness	2500cd/㎡	
	Viewing Angle	89°/89°/89°/89°(L/R/U/D)	
	Aspect Ratio	16:9	
	Contrast Ratio	1200:1	
	Color	16.7M/8Bit	
	Backlight Lifespan	50,000hrs	
Android Solution	CPU	Coretex-A17 RK3288,Quad Core,1.8GHz	
	Memory	DDR-3, 2GB	
	Storage	16G EMMC NAND	
	O/S	Default Android7.1(11 optional)	
	Network	Ethernet (10/100M), Wi-Fi (802.11 b/g/n) (3G/4G Mobile network optional)	
	I/O	HDMI-out*1, USB*2, DC input*1, TF card slot*1	
Monitor Solution	I/O	HDMI-in*1, USB*1, SD card slot*1	
	Play Mode	Loop display of video / image/ image + audio	
	Support Media	Video, Image, Audio	
Dimension	Appearance	Black metal shell	
	Bezel	8.5mm	
	Net Weight	20.5 KGS	29.2 KGS
	Net Size	1230.8 x 701.8 x 33.5mm (with electronics back 57.2mm)	1449.8 x 824.8 x 33.5mm (with electronics back 57.2mm)
	Intallation	VESA 400*400. Wall Mounting / Ceiling / Floor Standing.	
Power	Power Input	AC 180-240V, 50/60Hz.	
	Consumption	180W	205W
Others	Speaker	2*5W	
	Working Environment	-10℃~50℃, 10%~90%	
	Storage Environment	-20℃~50℃, 5%~90%	
	Accesories	User Guide, Antenna, Power Cord	

Accessories

Antenna

Remote Control

Power Cord

Screws

Keys

Application

Shop with Window Facing

Hospitality

Restaurant and Café for menu

Bank and FinancialInstitution

About Betvis

Betvis was established in 2009, with factory based in shanghai, covering over 36,000 square meters, the production base is equipped with first-class production and assembly lines, all empowered by a strong R&D team. This state-of-the-art facility can achieve a monthly output capacity over 8,000 units, with a wide range of DS products, like digital signage player, high brightness window display, floor standing kiosk, stretched display, bus LCD monitor, interctive display, DOOH device, and more.

Making a better visual of digital signage is what Betvis has been pursuing for so long. By working with customers who are as dedicated as we are, we have made this dream come true in over 70 countries. Our passion for digital signage has never diminished, which makes our lives full of challenges, motivation, and fun.

Betvis International Co.,Limited

Shanghai Betvis Information Technology Co., Ltd.

7th Floor,No.865 Jiuxin Road,Songjiang,Shanghai,China,2016 15

+86 21 57622267

info@betvis.com

www.betvis.com