BETVIS LED POSTER

BV-LP248

Indoor Series：1.86mm | 2.5mm

Fine Pixel Pitch Intelligent LedPoster

Features

HD Image Quality

The grey of the display image will not lose when the brightness is low, benefit for long time view

Front Access

The module, power supply, receiving card can be access after removing protective cover

Plug & Play

No external controller needed, the content can be played once power on

Beter Protection

High endurance, reduce the damage to the LED lamp in the movement

Seamless Splicing

Remove the bezel then splice the posters together with connectors, no edge line

Flexible Bracket

Each LedPoster is equipped with a folding bracket, convenient and practical

Features

Multiple screen splicing, no edge line

4 Sets P1.25 / 5 Set P1.56 / 6 Set P1.875

reach 1080P standard resolution

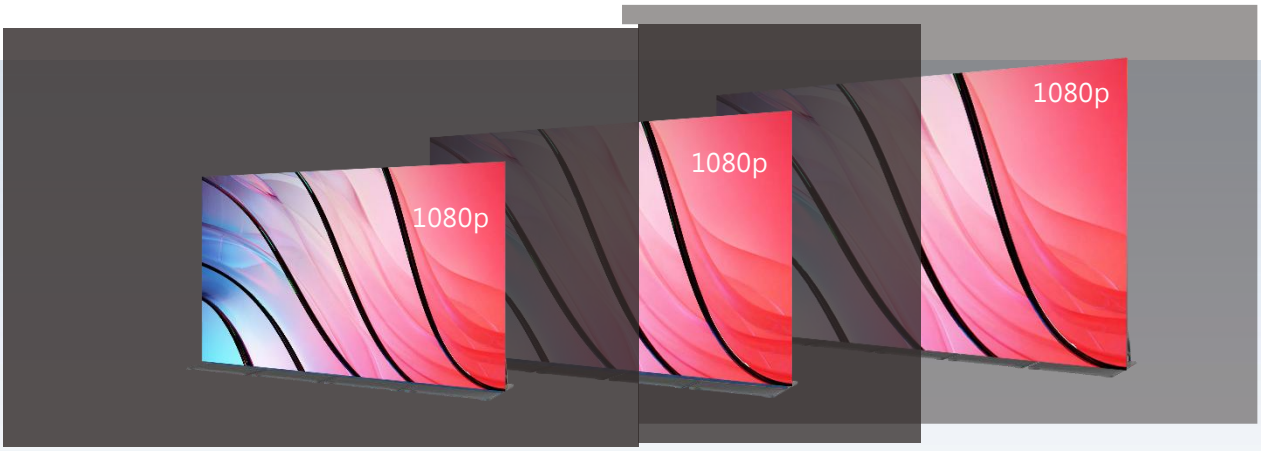

4 sets P1.25mm
4 cabinets high

5 sets P1.56mm
5 cabinets high

6 sets P1.875mm
6 cabinets high

Intelligent Cluster Control System

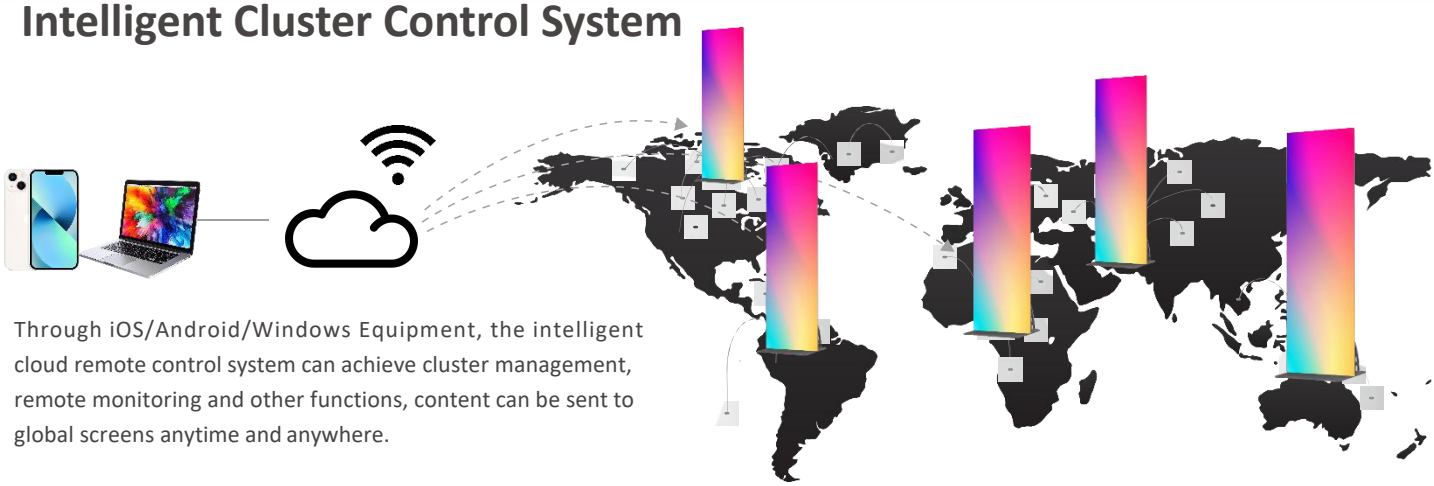

Through iOS/Android/Windows Equipment, the intelligent cloud remote control system can achieve cluster management, remote monitoring and other functions, content can be sent to global screens anytime and anywhere.

Multiple Playback Modes

PC Phone PAD USB

Multiple Interface

USB HDMI x2 Audio LAN

Working Modes

Synchronous Asynchronous

Cellphone Playback

- Friendly user interface
- Dual WiFi (AP & Sta modes)
- Adaptively play according to the screen size
- Each page can be set for timeslot or cycle
- Intelligent brightness adjustment (automatic and timing)S

App: ViPlex

Scan the QR code to download ViPlex

Specifications

LED Type	Glue-On-Board	Glue-On-Board
Pix Pitch	P1.86	P2.5
Cabinet Size (HxWxD,mm)	640*480mm	640*480mm
Cabinet Resolution (HxW)	344*258	256*192
Cabinet Quantity	4	4
Screen Size (HxWxD,mm)	650*1930*55mm	650*1930*55mm
Screen Resolution (HxW)	344*1032	256*768
Brightness (cd/m2)	800	800
Max. Power Consumption	660	630
Avg. Power Consumption	190	180
Net Weight (KG/set)	45	45
Refresh Rate (Hz)	1920`3840	1920`3840
Viewing Angle (H/V)	160°/160°	160°/160°
Maintenance	Front Service	Front Service
Operating Temperature	-10°C to +40°C	-10°C to +40°C
Operating Humidity	10% to 90%RH	10% to 90%RH
Video Format	Support RM, FLV, AVI, MP4 and other mainstream video formats.	Support RM, FLV, AVI, MP4 and other mainstream video formats.
Picture Format	Support JPG, PNG and other image formats	Support JPG, PNG and other image formats
Control Interface	HDMI x 1, USB2.0 x 2, AUX x 1	HDMI x 1, USB2.0 x 2, AUX x 1
Operating Equipment	Phone, iPad, PC	Phone, iPad, PC

Installations

Screen cascading



Creative installation

Bracket standing

Base standing

Hanging installation

Appliance

Meeting room, Exhibition booth, Entertainment show, etc

Hotel, Theater, Costume store, Jewelry shop, Shopping Mall, etc

Telecom · Hospital, School, Bank, Museum, Library etc

Airport Station, Railway Station, Bus Station, etc

About Betvis

Betvis was established in 2009, with factory based in shanghai, covering over 36,000 square meters, the production base is equipped with first-class production and assembly lines, all empowered by a strong R&D team. This state-of-the-art facility can achieve a monthly output capacity over 8,000 units, with a wide range of DS products, like digital signage player, high brightness window display, floor standing kiosk, stretched display, bus LCD monitor, interctive display, DOOH device, and more.

Making a better visual of digital signage is what Betvis has been pursuing for so long. By working with customers who are as dedicated as we are, we have made this dream come true in over 70 countries. Our passion for digital signage has never diminished, which makes our lives full of challenges, motivation, and fun.

Betvis International Co.,Limited

Shanghai Betvis Information Technology Co., Ltd.

7th Floor,No.865 Jiuxin Road,Songjiang,Shanghai,China,2016 15

+86 21 57622267

info@betvis.com

www.betvis.com